

Optima2

Modular Precision Air Conditioners for Data Centers



Product Introduction

Optima2 is a next generation product which combines the advantages of inverter precision air conditioning with modular design technology, specially designed for medium to big data center applications.

This series incorporates cutting edge features, such as modular design, inverter compressor, EC fan, DFC options, Netone control, etc.

Unit Identification

01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18
OP2			A	X	040			V	1	D	1	A	C	-	S	T	X

01-03	OP2	Model Series: OP2 – Optima2 precision air conditioner, abbr. as OP2
04	A	Cooling Method: A – Air Cooled
05	X	Free Cooling Options X – Standard D – Direct Free Cooling
06-08	040	Capacity: 040 – 40kW/080 – 80kW/120 – 120kW/160 – 160kW
09	V	Compressor: V – Inverter Compressor
10	1	Number Of Compressor: 1/2/3/4
11	D	Cabinet Type T – Top Flow D – Down Flow
12	1	Number Of Cabinets: 1/2/3/4
13	A	Refrigerant: A – R410A
14	C	Power Source B – 208~230V/3PH/60Hz C – 460V/3PH/60Hz F – 575V/3PH/60Hz
15	-	Separator
16	S	Heater Option In Each Cabinet X – Standard S – 6kW Electrical Heater N – 9kW Electrical Heater
17	T	Humidifier Option In Each Cabinet X – Standard T – 3kg Electrode Humidifier V – 5-8kg Electrode Humidifier F – 4kg Infrared Humidifier
18	X	Custom Option X – Standard M – Middle Unit W/O Side Doors And Control Interface, Applicable Only To 40kW Unit

For Example:

OP2AX040V1D1AC-XXX

40kW standard unit, 1 compressor, down flow, R410A, 460V/60Hz/3PH, without any options.

OP2AX040V1D1AC-SVM

40kW Standard unit, 1 compressor, down flow, R410A, 460V/60Hz/3PH, 6kW heater and 5-8kg electrode humidifier. This unit will be deployed in the middle of multiple units, so it doesn't have side doors and control interface. This code is only used for distributors to place a stock order of 40kw units.

Energy Saving Technologies

Inverter Compressor


Optima2 inverter series precision air conditioners adopt energy-efficient DC inverter scroll compressors that can achieve stepless speed and on-demand cooling capacity adjustment to achieve the greatest efficiencies.

The inverter system manages the compressor speed with infinitely variable control according to the actual cooling demand;. When the difference between room and setpoint temperatures is high, the compressor operates at a high speed (and greater cooling capacity). As the temperature difference reduces, the compressor speed gradually reduces to more accurately maintain room temperature (a subsequently conserving energy).



1 More Precise Temperature Control


Compared to a fixed-frequency compressor, an inverter compressor can achieve more precise temperature control through maintaining the room temperature closer to the setpoint temperature. The control accuracy can be as close as $\pm 0.5^{\circ}\text{C}$ ($\pm 0.9^{\circ}\text{F}$), even when the load is constantly changing. The comparison between fixed-frequency and inverter compressor temperature control accuracy is shown on the right picture.

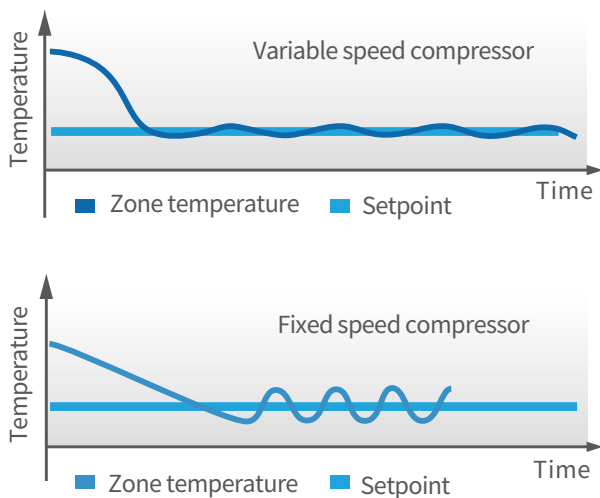

2 High Efficiencies, Lower Noise

Compared to the on/off operation of fixed-speed compressors, inverter compressors have stepless speed changes which, through intelligent control, consistently aim to run at the most efficient operating point. This variable frequency operation can save nearly 30% on operating costs.

Results from an AIRSYS performance test of fixed-frequency vs. inverter compressors can be seen in the graph; the stark difference between compressor COPs is easily seen.

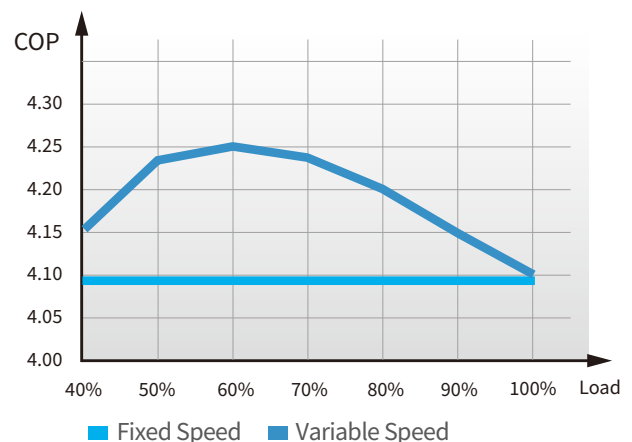

Additionally, an inverter compressor starting current is only about 10% of that of a fixed-frequency compressor, they typically have a higher reliability and the noise generated at part load is approximately 5-10 dB lower.

EC Fan


An EC fan refers to a centrifugal fan that utilizes an Electronically Commutated motor (or brushless DC motor).

EC fans have numerous benefits including:

Energy Efficiency

EC fans have brushless DC motors and integrated control modules. Motor efficiencies of 85-90% are achievable; 30% to 50% higher than traditional AC fans.

The difference in energy efficiency between variable speed EC fan control and traditional on/off fixed speed AC fans can be seen in the graph; the bars show the power consumption of fans which are switched in gradually as required while the blue curve shows the power consumption with infinitely variable speed control.

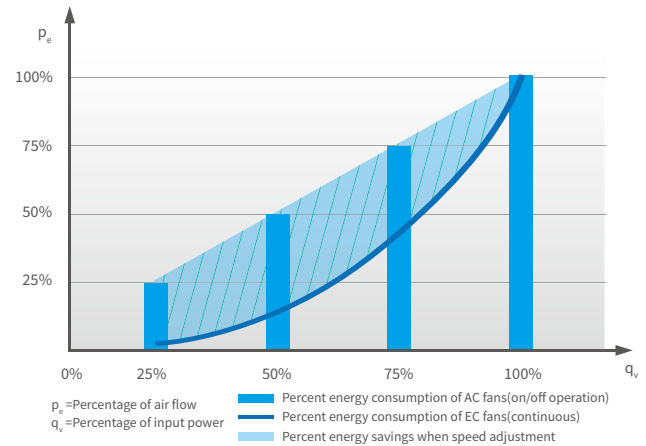


Lower Noise

EC fans are able to operate across an infinitely controllable speed range, which in turn effectively avoids electromagnetic and rectifier noise (generated by other traditional motor and speed control devices), thus reducing the overall noise level.

In the graph, the bars indicate the sound pressure level of fans which are switched in gradually as required and the blue curve shows the sound pressure level with infinitely variable speed control.

As can be seen from the picture EC fan sound pressure level is 12dB lower compared to the traditional AC fan.

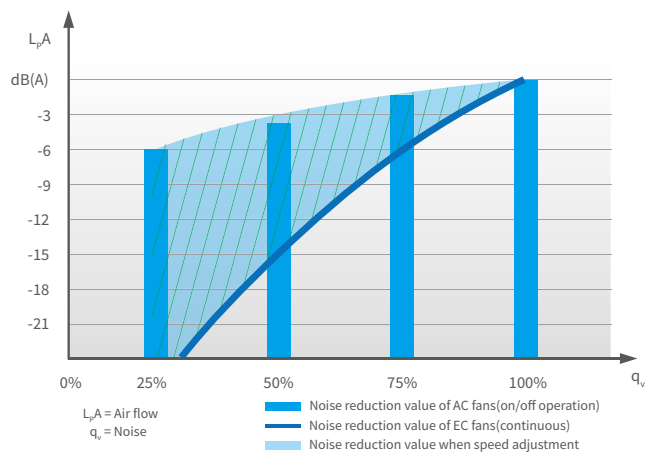

Compact, Integrated Electronic Control System

All EC fans have dedicated speed control modules and filters built into the motor assembly, making for a compact and self-contained solution. All that is required is to connect the main power supply and the sensor signals to the controller for complete speed control of between 10% and 100%. EC fans provide a simple, convenient solution and can also support group control and remote monitoring.



Electronic Expansion Valve

Optima2 Inverter Series precision air conditioners utilize electronic expansion valves to regulate the refrigerant flow entering the evaporator and match it to the running speed of the compressor. Compared to thermal expansion valves, electronic expansion valves control much more accurately and efficiently. They are also able to control system evaporation temperature and superheat more effectively and lead to an overall higher system efficiency.



Energy Saving Options


Data center power consumption is generally divided between four major sources; IT equipment, cooling systems, backup power and lighting systems. The specific proportions are different in each data centers, however a typical split is presented here.

As the data show, the energy consumption of the cooling system is second only to the actual IT equipment; i.e. the air conditioning systems account for a large portion of the total energy consumption of the data center. Therefore, by taking advantage of direct free cooling solutions, large energy savings are potentially achievable. AIRSYS has developed the direct free cooling systems, which can significantly reduce the overall energy consumption of a data center. Options are available or configurable to suit any and all installation requirements.




Direct Free Cooling (DFC)


For installations where outdoor temperatures are commonly lower than indoor temperature, fresh air can be introduced directly into the room to cool the equipment; this is known as direct free cooling (DFC). A well designed and integrated DFC system can greatly reduce the dependency on other cooling systems and save energy through minimizing their run hours. DFC systems can be integrated with Optima2 units, with up flow and down flow configurations. The corresponding series names are Optima2-DFC. The diagram showing the arrangement and principle for direct free cooling options is as follows:

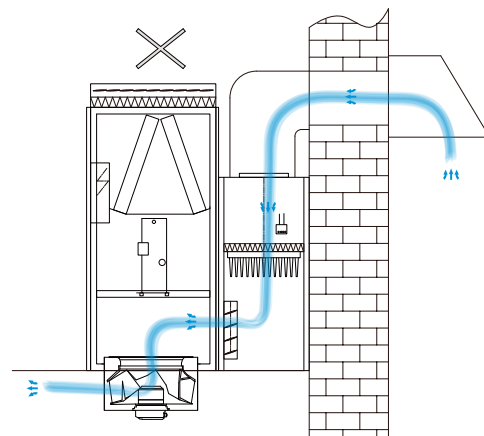

Free Cooling Mode

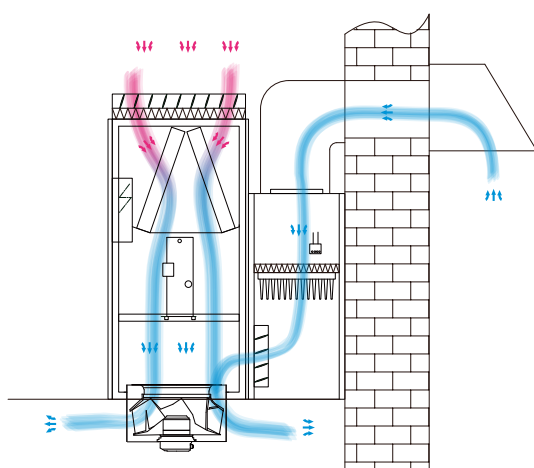

Free Cooling + Mechanical Cooling

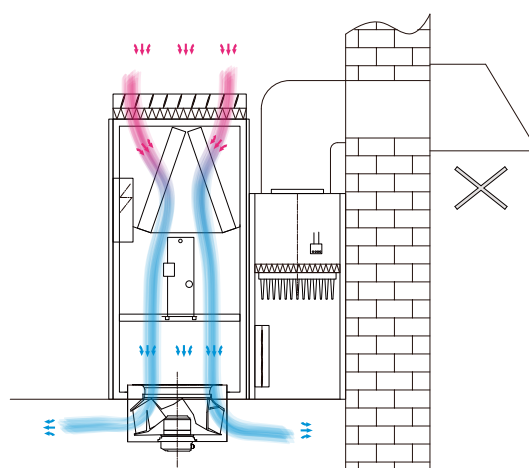


Mechanical Cooling Mode

Optima2 systems include mechanical (DX) cooling and free cooling modes, together with the intelligence to switch between the modes to ensure the most efficient operation. When utilizing direct free cooling, the DX system compressor stops, which has a significant impact on the energy consumption.


In recent years, energy-efficient data centers have attracted greater attention and many data centers are now able to achieve significant energy savings through both increasing the IT equipment tolerance temperatures and expanding the considered geographical scope to exploit direct free cooling (which is not only limited to regions of extreme cold).

Modular Design

The Optima2 adopt product level modular design, the basic model with all the components. can work independently. Basic models can be easily added and integrated, to adapt to project-specific room size and different site conditions.



15-40kW



30-80kW



45-120kW

1 Flexible Layout

Modules can be deployed horizontally to make product fast to meet customer requirements. When the user has a demand for 80kW cooling capacity or even greater cooling capacity, only the number of basic models needs to be determined according to the cooling capacity demand, and the basic models can be simply assembled.

1-4 units can share a display, as a group. If there are more than 4 sets, multiple displays are needed, which can be regarded as multiple groups. After the network cables are connected between multiple units, the main and standby units can be switched, and they can back up each other. In theory, there can be 16 units, that is, up to $16 \times 4 = 64$ units can be controlled together. Communicate with the host computer via TCP/IP.

2 Scalability


Easy to expand the cooling capacity gradually. The Optima2 allows scalability for future growth, as well as the ability to efficiently add redundant units for maximum reliability in the most mission-critical applications.

3 Convenience

Modular design units can be quickly unpacked and connected to convenience to transportation, installation and service, optimizing the entire installation process and reducing installation costs.

4 Quick Response

Product structure modularization and parts generalization, same basic models can be concurrently produced and have short production cycles, ensuring a quick response in all situations.

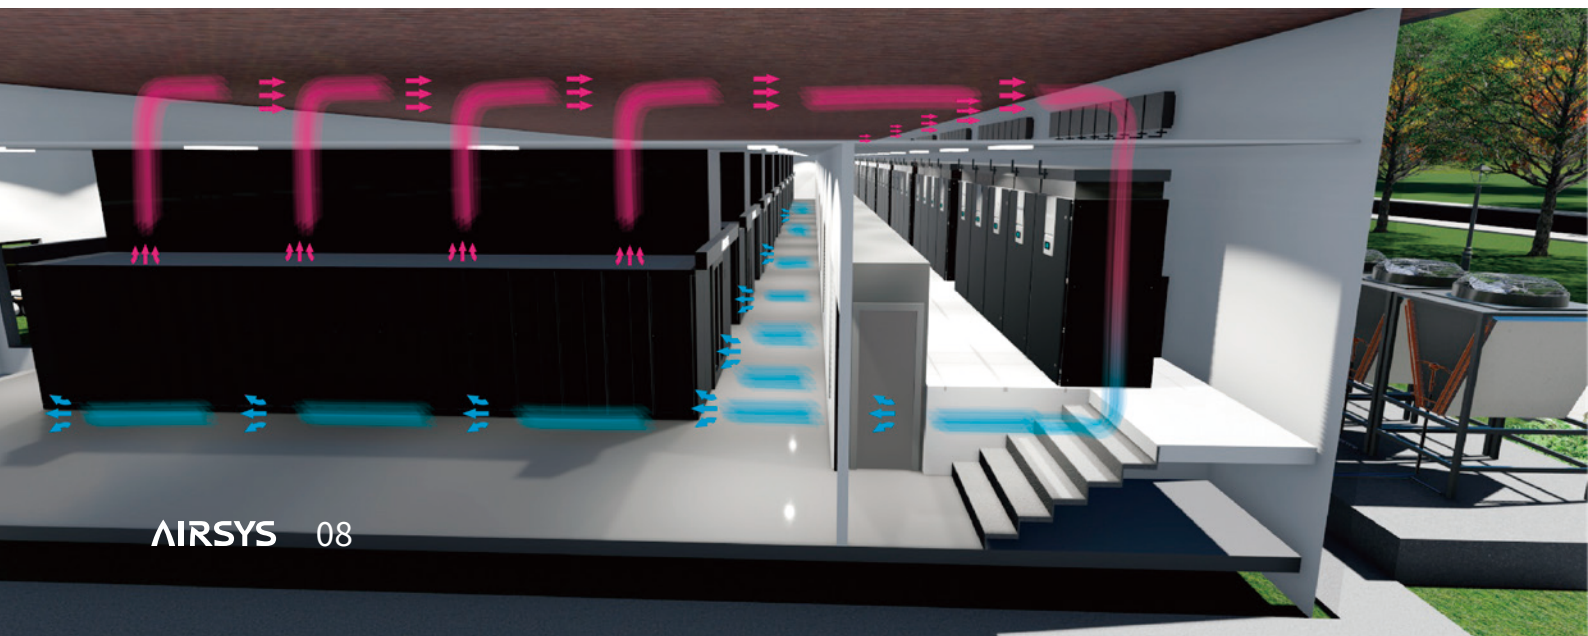

Engineered Features

1 High Efficiency

Optima2 units incorporate numerous energy saving technologies with compact structure. Under the same cooling capacity, the units can save more space for user. The energy saving technologies allows Optima2 rated for 12.1 EER.

2 Modular design

Modular design, easy to extend the cooling capacity, applied for newly or upgraded data center.

3 Small Size and Quick Installation

Optima2 units are smaller than more traditional room air conditioning, making them significantly easier to transport in freight elevators and with standard equipment. Once arriving at the installation site, a unit can be quickly unpacked and connected, optimizing the entire installation process and reduce installation costs.

4 Self-diagnosis

All the microprocessor-connected components are continuously monitored and controlled and, in case of malfunction, the unit is shut down and the fault is shown on the display.

5 High Reliability

Strong adaptability for the harshest environments, operation rang -35°C(-31°F) ~ +52°C(125.6°F).

6 Precise Control

The control accuracy for temperature is $\pm 1^{\circ}\text{C} \pm 1.8^{\circ}\text{F}$) and for Relative humidity is $\pm 5\%$.

7 Easy Maintenance

The technical compartment housing the compressor, control and safety devices is separates from the air flow, enabling ordinary service and preventive maintenance to occur during operation.

8 Scroll Compressor

Optima2 units are equipped with a scroll inverter compressor which can vary speed continuously according to the cooling demand.

9 V-shaped Condenser

V-shaped condenser coil design provides better heat rejection with smaller footprint and lower weight, solving the problem of congestion in the air-cooled outdoor installation area. Special structure design allows combined installation, provides easy access to installment and maintenance.

10 Air Filter

A washable, easy maintainable and durable G4 class air filter is a standard configuration for the Optima2 range. With optional air pressure switch, a clogged filter alarm can be triggered when the filter is dirty.

11 Environmentally Friendly Refrigerant

R410a is used in Optima2 units, which meets the requirements of environmental protection refrigerants.

12 EC Fan

Highly efficient EC fans are supplied with Optima2 products.



Options for Optima2

Indoor Options			
1	DFC Plenums	16	90 Deg Turning Vane
2	6kW Electric Heater	17	Refrigerent Leak Alarm
3	9kW Electric Heater	18	Backdraft Damper (Upflow Only)
4	3kg Electrode Humidifier	19	Free Discharge Plenum (Upflow Only)
5	5-8kg Electrode Humidifier	20	Supply Air Plenum (Downflow Only)
6	4kg Infrared humidifier	21	Energy Monitoring
7	Adjustable Stand 350~450mm (Downflow Only)	22	Locakable Disconnect Switch
8	Gravity Damper (Exhaust Damper)	23	Automatic Transfer Switch
9	Motorized Damper (Exhaust Damper)	24	Wooden Crate
10	Exhaust Fan (DFC)	25	Additional Floor Water Detector
11	MERV13 Filter (Downflow Only)	26	Expansion card
12	Condensate Pump with Overflow Swtich	27	Floor Supply Pressure Detection
13	Filter Alarm	28	Low Ambient Kit (-20F)
14	Dust Alarm (AFPD)	29	Low Ambient Kit (-40F)
15	Floor Water Detection	30	Wooden Crate

Control Options		Condenser Options	
1	Muti-Control (Within one system)	1	Coastal Coating
2	Group-Control (Multi systems)	2	Level 1: Coil coating
		3	Level 2: Stainless steel housing

Technical Parameters

Optima2(-DFC).DXA

Model		040V1
Air Flow Scheme (1)		O/U
Refrigerant Type		R410A
Unit Cooling Capacity (2)	kW(BTU/h)	43(146,760)-20(68,260)
Air Volume	m ³ /h(SCFM)	11,170(6,580)
Outdoor Condenser		
Normal Configuration		VME60*1
Direct Free Cooling (Optional)		
Model		DFC-X1
Electric Heater (Optional)		
Type		Stainless steel
Electric heater capacity	kW	6
Current	A	7.5
Humidifier (Optional)		
Type		Electrode type
Humidification capacity	kg/h (lb/hr)	3(6.6)
Power	kW	2.3
Current	A	2.9
Unit Piping Connection		
Humidifier water supplyΦ	in	1/2"
Condensate water drainageΦ	in	3/4"
Refrigerant discharge	in	1"
Refrigerant liquid	in	5/8"
Power Supply		
Power source		460V/3Ph/60Hz
Unit max. operating power	kW	31.3
Unit max. operating current	A	44.5

(1)- O: Up flow, U:Down flow;

(2)- Return dry-bulb temperature 29.4°C (85°F), RH45%, outdoor ambient temperature 35°C (95°F).

Technical Parameters

Variable Speed Compressor of Unit Capacity


Model	Return Temp. DB/DP °C(°F)	Total Capacity kW(BTU/h)	Sensible Capacity kW(BTU/h)	SCOP(kW/kW)
OP2AX040V1(1)	29.4°C/11.1°C (85°F/52°F)	40.8 (138,200)	40.0 (134,800)	3.0
		32.7 (111,600)	32.1 (109,556)	3.7
	23.9°C/11.1°C (75°F/52°F)	35.5 (121,160)	35.4 (120,820)	2.7
		31.8 (108,530)	31.7 (108,190)	3.1

Direct Free Cooling Performance


Model	DT between Indoor and Outdoor °C	Total Capacity kW(BTU/h)
OP2AD040V1 (1)	6°C	23 (78,011)
	8°C	30 (104,014)
	10°C	38 (130,018)
	12°C	45 (156,021)

Unit Dimension Drawing


Cabinet Dimension Drawing for Under Flow Unit

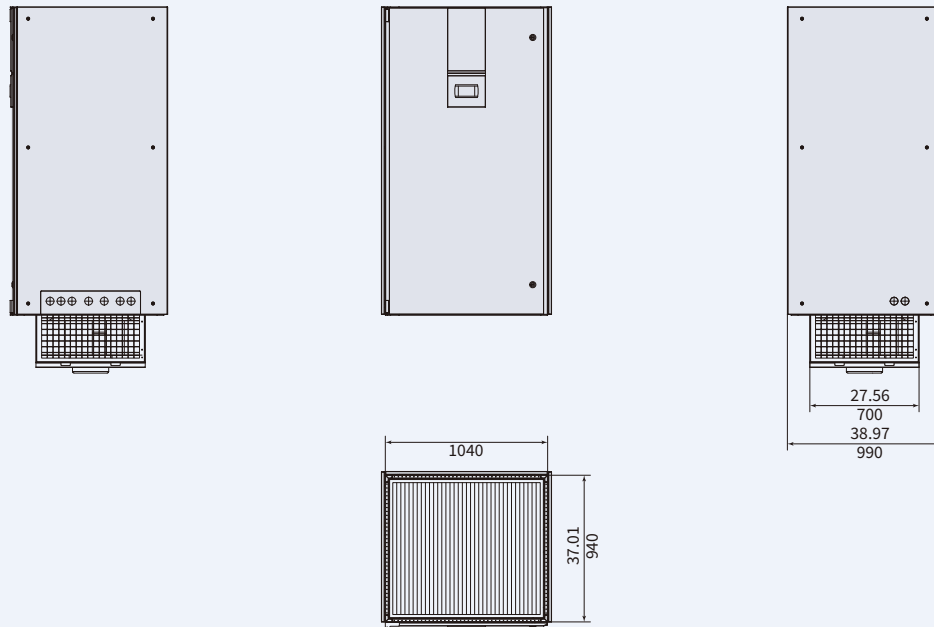


Cabinet Dimension Drawing for Up Flow Unit

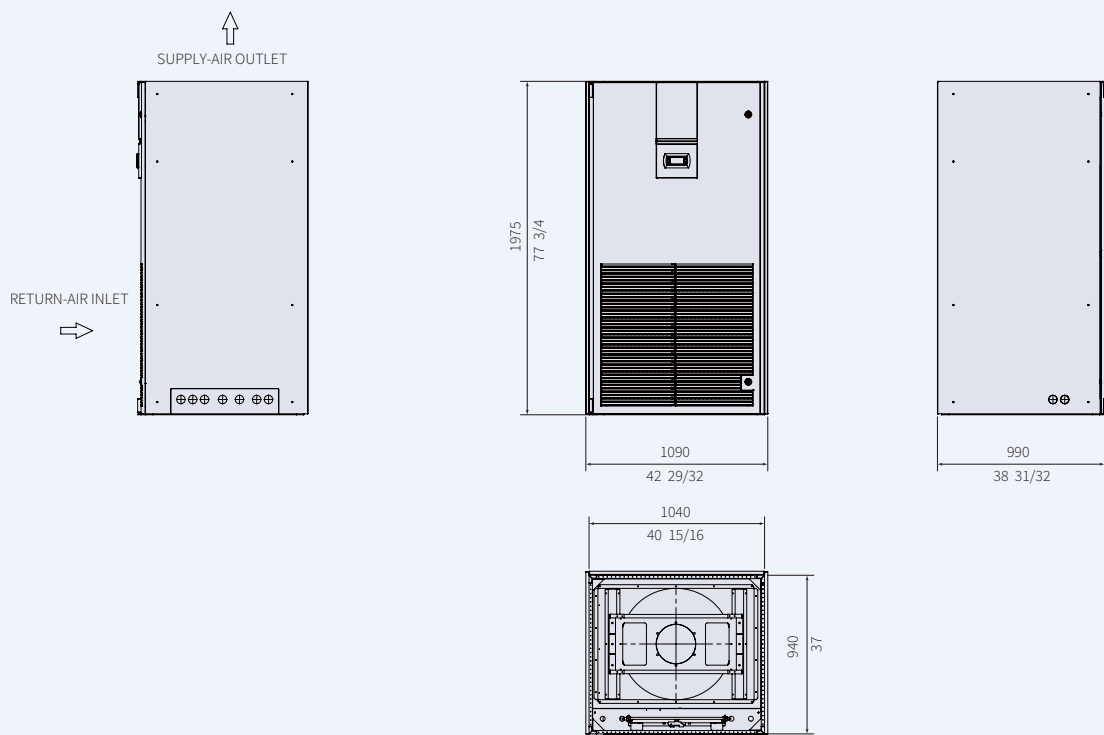


Optima2-DFC Fresh Air Inlet Box Dimension Drawing

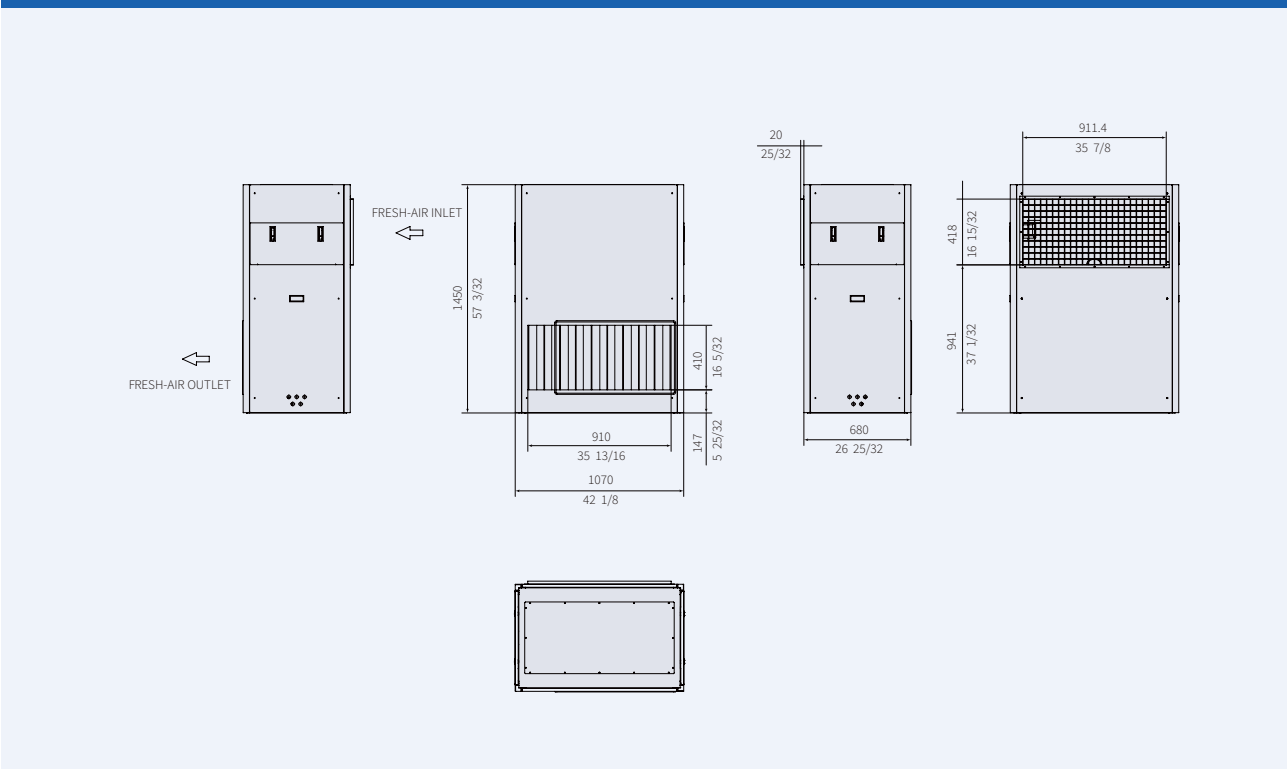

Optima2-DFC Fresh Air Return Box Dimension Drawing

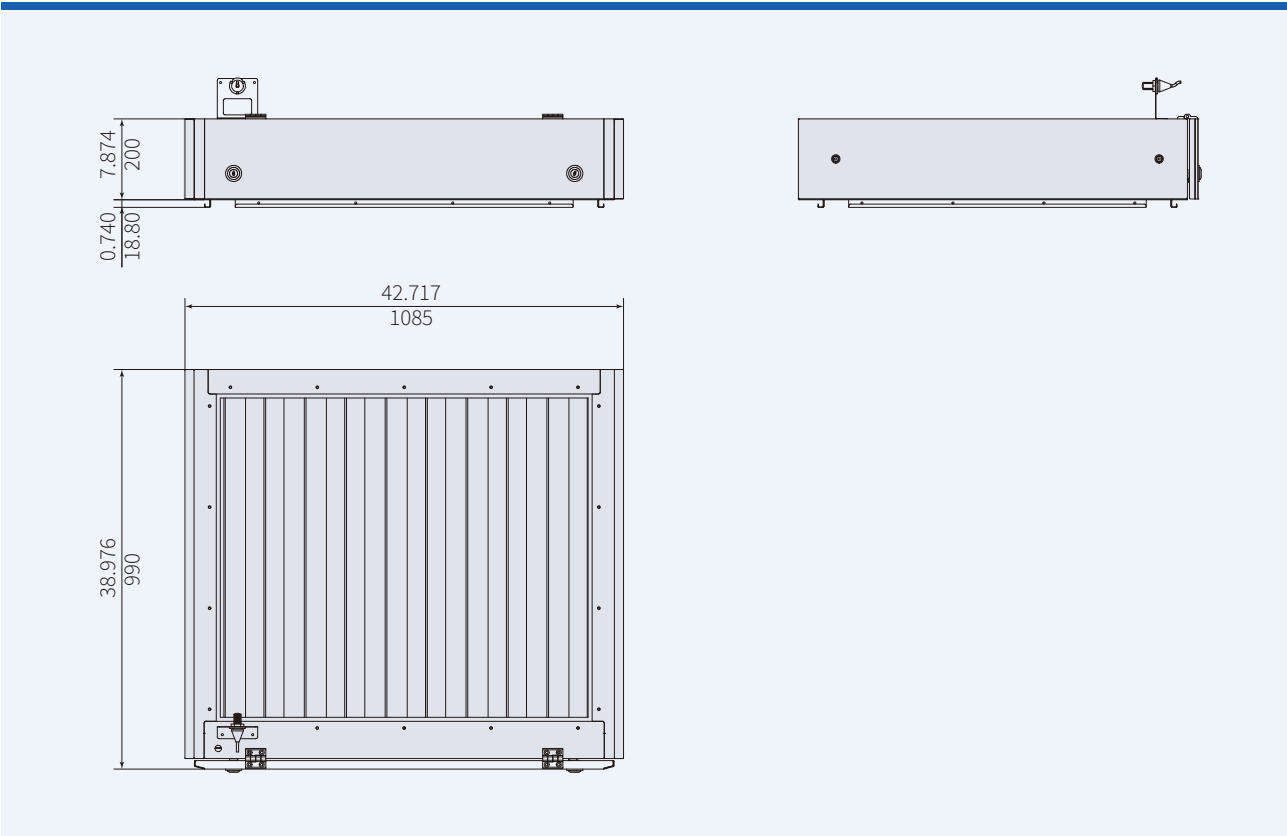

VME60 Dimension Drawing

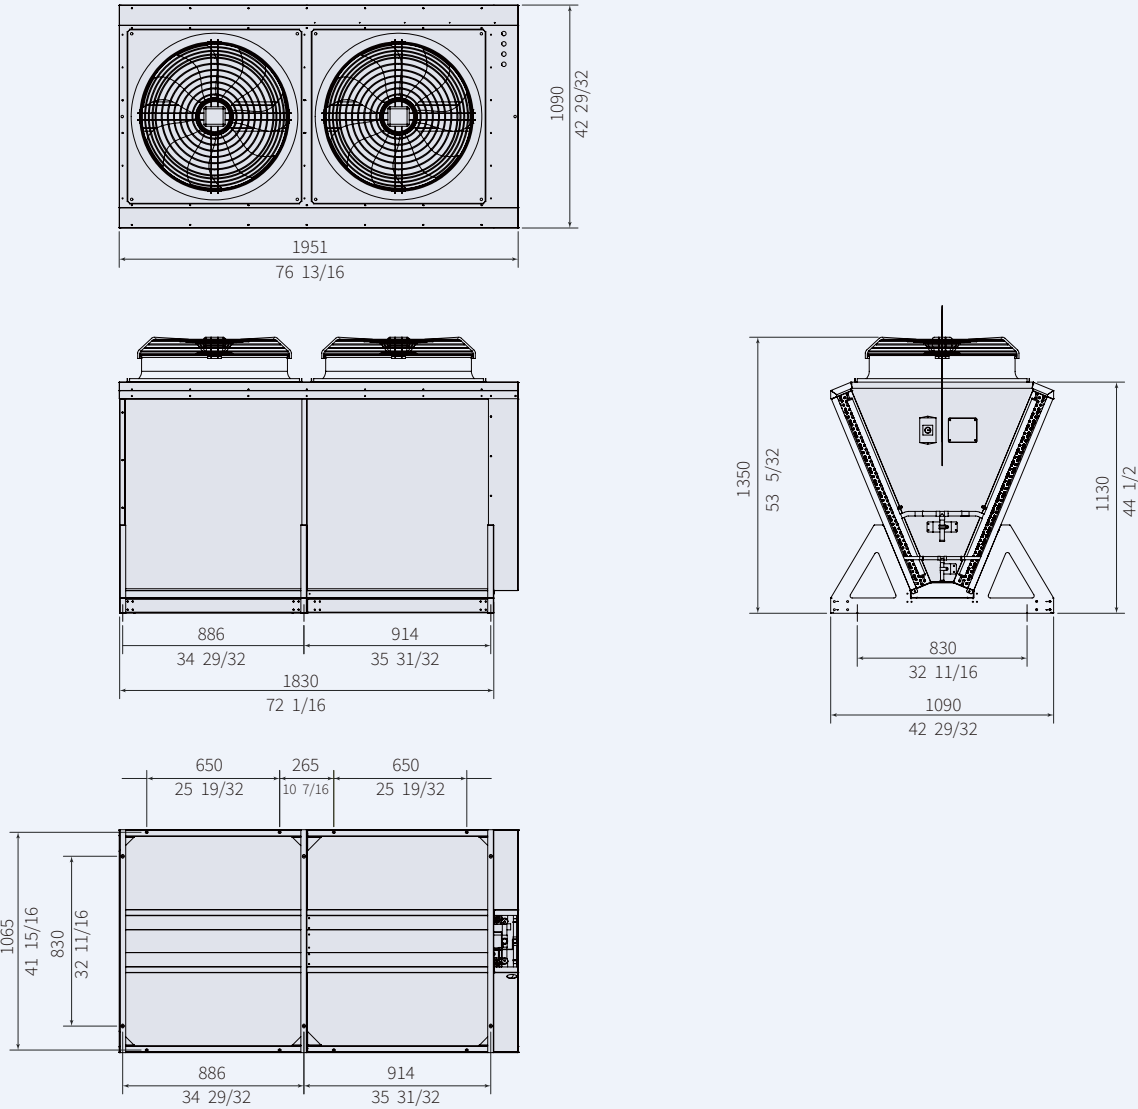



AIRSYS

Headquarter

AIRSYS Cooling Technologies, Inc

Add: 7820 Reidville Rd. Greer, SC 29651, USA
Tel: +1 (855) 874 5380
Email: sales@air-sys.us

AIRSYS (UK) Ltd.

Add: 245 Europa Boulevard, Warrington, UK. WA5 7TN
Tel: +44 (0) 1925 377 272
Call Centre: +44(0)8456099950
Email: enquiries@air-sys.uk

AIRSYS Brasil Ltda.

Add: Av. Moaci, 395 Conj 35/36 04083-000 – Planalto Paulista
SAO PAULO – SP
Tel: +55 (11) 25976817 / +55 (11) 21585560
Email: airtsys-brasil@air-sys.com.br

AIRSYS Deutschland GmbH

Add: Feringastr. 6, 85774 Unterföhring / München, Germany
Tel: +49 89 9921 6510
Email: anfragen@air-sys.eu

AIRSYS Refrigeration Engineering Technology (Beijing) Co., Ltd.

Add: 10th floor, Hongkun Shengtong building, 19, Ping Guo Yuan Xi Xiao Jie, Shijingshan, Beijing, China 100043
Tel: +86(0)10 68656161
Email: airtsys@air-sys.com

Gu'an AIRSYS Environment Technology Company Ltd.

Add: 25, Dongfang Street, Gu'an Industry Park, Langfang City, Hebei Province, China
Tel: +86(0)10 68656161

Shanghai AIRSERVE HVAC System Service Co., Ltd.

Add: Room 1701, Xinda building, No. 322 Xianxia Road, Changning District, Shanghai, China 200336
Tel: +86(0)21 62452626 Fax: +86 (0)21 6245962

AIRSYS Singapore Pte. Ltd

Add: 50, Tagore Lane Entrepreneur Centre, #03-04 (F), Singapore 787494
Tel: +65 64991850
Fax: +65 68416301
Email: sales@air-sys.sg

AIRSYS Philippines Corporation

Add: Unit 1205 12th Floor the Pearl Bank Centre Bldg., #146 Valero St. Salcedo Village, Bel-Air, City Of Makati, Fourth District, National Capital Region (Ncr), 1227, Philippines
Tel: +632 5310 1680
Email: sales@air-sys.sg

AIRSYS Malaysia Sdn. Bhd.

NO. 7-1, Jalan 109F, Plaza Danau 2, Taman Danau Desa, 58100 Kuala Lumpur Wilayah Persekutuan Malaysia
Tel: +60 3 7982 2010
Fax: +60 3 7980 1242
Email: sales@air-sys.sg

AIRSYS Australia Sales Office

Add: PO BOX 1088, Flagstaff Hill, SA, 5159, Australia
Tel: +61 479151080
Email: sales@air-sys.sg

Product design and specification subject to change without prior notice

AIRSYS

one
solution